



Constructing a Detached Shed, Garage, Carport or Accessory Structure at your Home

Accessory structures, such as sheds, detached garages, and carports, within Oregon City limits are regulated by the Oregon City Building, Planning, and Development Services Divisions, and must comply with applicable standards. The requirements for detached sheds, garages, carports or accessory structures may be found in Title 17 of the Oregon City Municipal Code and Section 105.2 of the Oregon Residential Specialty Code.

Step 1: Research

Accessory Structure Size

The Oregon City Municipal Code provides different standards based upon the footprint of the structure (area where the structure touches the ground).

Building Footprint less than 200 hundred Square Feet.

Provided you comply with all of the other regulations you may have multiple structures less than 200 square feet.

Building Footprint from 200 hundred to 600 hundred Square Feet.

Provided you comply with all of the other regulations you may have multiple structures with a footprint of 200-600 square feet.

Building Footprint Over 600 hundred Square Feet must:

- Be located on a property in excess of 20,000 square feet in size;
- Not have another accessory building with a footprint over 600 square feet on the property;
- Not be taller than the home;
- Not have a building footprint larger than the footprint of the home; and
- Not be larger than 800 square feet.

Property Use

The property must have a single or two-family dwelling (duplex) onsite. Accessory structures are not permitted on vacant lots. Please contact the Planning Division if the property is used for anything other than a single-family home or duplex as additional review may be needed.

Overlay Districts

Construction on properties with or near streams, steep slopes, landslides, high water tables, floodplains or historic structures may require additional review. To find out if your property is located in an overlay district, please obtain a property report at: <https://maps.orcity.org/galleries/reportTaxlotPublic/index.html>.

The overlays are listed under “Land Use and Planning” on the Property Zoning Report. If a “Y” is marked, please contact the Planning Division to verify if additional research is needed and the setbacks may be different for your property.

Accessory Structure Placement / Easements etc.

The structure may not be located in front of the home, or in any public easement areas. Please note that public utility easements may be larger than setbacks and will affect the placement of structures.

Prohibited Structures:

- Cargo containers are defined in OCMC 17.04.177




- Membrane or fabric covered storage area, as defined in OCMC 17.04.743, if visible from the adjacent right-of-way. Refer to definition in OCMC Section 17.04.743.



- Metal structures within the McLoughlin Conservation District, the Canemah National Historic District, or on an individually designated historic property. *To learn if your property is located in a historic district or is individually designated, obtain a property report:*

<https://maps.orcity.org/galleries/reportTaxlotPublic/index.html>

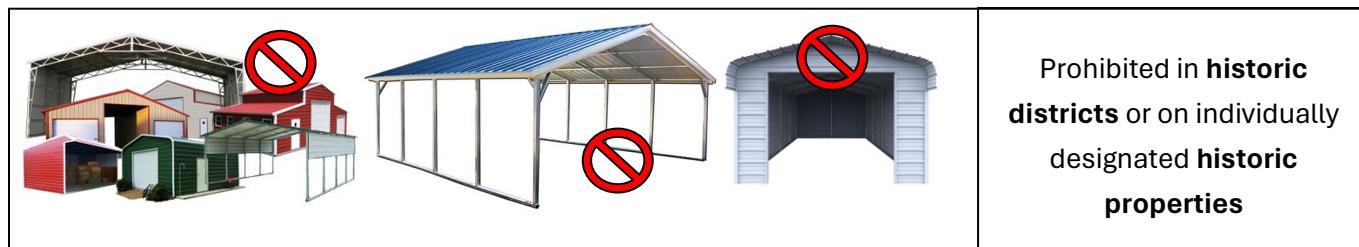

Lot Coverage: Structures 200 square feet or greater (excluding decks, covered and uncovered porches and eave overhangs), are limited to the following lot coverage:

R-10, R-8 and R-6 Dwelling Districts: 40% Maximum Lot Coverage

R-5 Dwelling District: 50% Maximum Lot Coverage

R-3.5 Dwelling District: 55% Maximum Lot Coverage

Property Lines: A survey is the only way to be certain of your property boundary. The Clackamas County Surveyor's Office at <http://cmap.clackamas.us/> may have a copy of your subdivision plat or a survey available.

Zoning and Setbacks: All structures must be separated (setback) a minimum distance from the property lines. Each property is assigned a zoning designation with a specific setback distance. Your zoning designation may be found by obtaining a property report at <https://maps.orcity.org/galleries/reportTaxlotPublic/index.html>. The zoning will be listed under "Land Use and Planning". Though some developments such as Planned Unit Developments and historic homes have site specific setbacks, the setback for most development is as follows:

Footprint of Less than 600 Square Feet in Size:

- The structure must meet the setbacks of the associated zoning designation listed below; or
- If the height of the structure does not exceed 17 feet (measured from the average exterior grade to the midpoint on the roof), then the interior side, corner side, and rear yard setbacks may be reduced to 3 feet* for the structure including projections. *The setback is therefore 3 feet plus any projections (such as eaves).*

** Please check your property plat or title for easements that may increase the distance that is needed between your property lines and any structure. Easements can also be found on OCWebMaps.*

Footprint of Over 600 Square Feet in Size:

- The structure must meet the setbacks of the associated zoning designation listed below.

If a "Y" is marked on your property zoning report under overlays or within a PUD, the placement of the structure may be different for your property. Though some developments such as PUD's and historic homes have site specific setbacks, the minimum setback for most development is:

Standard	R-10	R-8	R-6	R-5	R-3.5
Maximum height	35 ft.				
Minimum front yard setback	20 ft.	15 ft.	10 ft.	10 ft.	5 ft.
Minimum front porch setback	15 ft.	10 ft.	5 ft.	5 ft.	0 ft.
Minimum interior side yard setback	8 ft.	7 ft.	5 ft.	5 ft.	5 ft.
Minimum corner side yard setback	10 ft.	10 ft.	10 ft.	7 ft.	7 ft.
Minimum rear yard setback	20 ft.				
Minimum rear porch setback	15 ft.				
Minimum Garage setback	20 ft.				
Minimum Garage setback (alley)	5 ft.				

A complete description of each zoning designation can be found on the city website in Title 17 of the City Code Book. Refer to the applicable sections of the Oregon City Municipal Code for additional detail.

Projections which do not extend to the ground (such as eves) may extend up to 2 feet into the setback unless otherwise noted above.

CC&R's, Easements and other Restrictions: Past landowners may have placed private restrictions on your property. Check your title report or a trio report for your easements and restrictions and your neighborhood CC&R's (if applicable).

Design Standards: If you are building a new detached garage or carport or expanding an existing one, **5** elements below are required for the front of the home.

- Dormers.
- Gable roof or Hip roof
- Building face with 2 or more offsets of ≥ 16 inches
- Roof overhang of ≥ 16 inches
- Entry recessed ≥ 2 feet behind the front façade and ≥ 8 feet wide
- ≥ 60 square foot covered front porch that is ≥ 5 feet deep or
 ≥ 40 square foot covered porch with railings that is ≥ 5 feet deep and elevated entirely ≥ 18 inches
- Bay window that extends ≥ 12 inches outward from the main wall of a building and forming a bay or alcove in a room within
- Windows and main entrance doors that occupy $\geq 15\%$ of the lineal length of the home (not including the roof and excluding any windows in a garage door)
- Window grids in all windows (excluding windows in the garage door or front door)
- ≥ 4 -inch window trim
- Worth 2 elements. ≥ 4 -inch window trim on all elevations of the house
- Worth 2 elements. Wood, cladded wood, or fiberglass windows on all of the elevations
- Worth 2 elements. Windows recessed ≥ 2 inches from the facade on all of the elevations
- Front balcony that projects from the wall of the building and is enclosed by a railing or parapet
- ≥ 60 square feet of shakes, shingles, brick, stone or other similar decorative materials
- All garage doors are ≥ 9 feet in width or less
- All garage doors wider than 9 feet are designed to resemble 2 smaller garage doors
- ≥ 2 windows in each garage door
- A third garage door is recessed a minimum of 2 feet from the living space
- A window over the garage door that is ≥ 12 square feet with ≥ 4 inch window trim
- The living space of the dwelling is within 5 feet of the front yard setback
- The driveway is composed entirely of pervious pavers or porous pavement

Step 2: Submit your Plans

Permits ensure structures are built to the current Oregon Specialty Codes, comply with setbacks, environmental and historic regulations, design requirements, etc. Regardless of if a permit is needed or not, you are required to comply with the applicable construction standards. Building permits may not be required for residential sheds or accessory structures with:

- A footprint of 200 square feet and are less; and
- Are no taller than 10 feet in height (measured from the finished floor to the average height of the roof

- surface); and
- Are used for storage.

Planning Application

Complete a Planning application: (<https://www.orcity.org/DocumentCenter/View/2862/Accessory-Structure-Planning-Review-Application-Form-PDF>) demonstrating your building complies with the setbacks, lot coverage, design elements, and overlay districts. Draw a site plan (bird's eye view of your property with the proposed construction). The site plan must be drawn to scale and include any easements as well as the setback distances between the construction and the property lines.

Building Permit Application

Approval of your building permit application will ensure that the structure is constructed safely. With your application you must also provide:

- A completed building permit application
- Two (2) sets of detailed construction plans
- The contractor's name and state license (CCB) number if a contractor will be doing the work
- Oregon City or Metro business license number if a contractor will be doing the work

Once all necessary drawings and research have been completed, it is time to submit your plans. The applications can be obtained at www.orcity.org. Applicants are encouraged to submit the Planning and Building applications at the same time.

Depending on the quality and time of your submittal, the review process can range from over the counter to approximately four weeks. Once your plans have been approved, you will be notified that your permit is ready. After you pick up your permits, you may begin construction.

Step 3: Inspections

You are responsible for arranging an inspection from the Building Division for the following:

- Foundation
- Framing (including rough mechanical, electrical and plumbing if applicable)
- Insulation (if applicable)
- Final

The City of Oregon City accepts inspection requests in a variety of ways, available 24 hours a day, 7 days a week for your convenience.

- By Phone: 503-496-1551
- By Fax: 503-722-3880; OR
- Online: https://online.orcity.org/EnerGov_Prod/SelfService#/home

Inspections that are requested prior to midnight are normally conducted on the date requested. Inspection requests received after midnight will be completed the following business day, unless a later date is requested. Inspection staff provide inspection services between 8:30 am and 3:30 pm, Monday through Friday.